



SINGLE ZONE WALL MOUNTED HEAT PUMP SYSTEM

TW12HQ1C2A		
Indoor Unit		TW12HQ1C2AI
Outdoor Unit		TW12HQ1C2AO
Performance		
Cooling Rated Capacity	Btu/h	12,000
Cooling Cap. Range Min-Max	Btu/h	3,753~12,500
SEER/EER		16.0/10.55
Heating Rated Capacity(47°F)	Btu/h	13,000
Heating Rated Capacity(17°F)	Btu/h	7,600
Heating Cap. Range Min-Max	Btu/h	3,412~15,013
HSPF/COP		9.0/3.1
Electrical		
Voltage, Phase, Cycle	V-Ph-Hz	115-1-60
Voltage Range	V	103~127
MCA	A	20.0
MOP	A	30
Compressor RLA	A	15.2
Fan Motor FLA	A	0.23
Cooling Power Input	W	1,137
Heating Power Input	W	1,250
Piping		
Pipe Length Min-Max	ft	10~66
Piping Lift	ft	33
Liquid Line	in	1/4
Vapor Line	in	3/8
Connection Type		Flare



Operating Range		
Cooling Outdoor DB	°F	0~115
Heating Outdoor DB	°F	-4~75
System Data		
Compressor Type		DC Inverter Rotary
Refrigerant Tpye		R410A
Pre-Charge	oz	31.8
Pre-Charge Length	ft	25
Additional Charge	oz/ft	0.2
Refrigerant Control		EXV
ODU Sound Pressure (Cooling/Heating)	dB(A)	53/53
IDU Sound Pressure (Cooling Min/Max)	dB(A)	29/43
IDU Sound Pressure (Heating Min/Max)	dB(A)	29/43
IDU Airflow (Cooling Min/Max)	cfm	194/400
IDU Airflow (Heating Min/Max)	cfm	194/400
Dehumidification	pts/hr	2.96



Job Name:		Date:	
Reference #:			
Signature:			

TOSOT NORTH AMERICA
 930W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM



Features	
Inverter Type	G10
Ultra Low Frequency Torque Control	Standard
Power Factor Correction	Standard
Compressor Type	High Eff. Rotary
Refrigerant Type	R410A
Basepan With Electric Heater	Standard
Compressor With Electric Heater	Standard
Outdoor Fin Coating	Blue Fin
Intelligent Defrosting	Standard
Intelligent Preheating	Standard
Low Voltage Startup	Standard
Memory/Power Failure Recovery	Standard
Self Diagnosis	Standard
Wired Controller Interface (XK-41)	Standard
Wi-Fi Interface Capable	Optional
Indoor Fan Type	Crossflow
Multi Fan Speeds	4 Speeds
Indoor Unit Display	Standard
Advance Filter	Optional
Auxiliary Electrical Heater	Not Available
Ventilation (Outdoor Air)	Not Available

Remote Controller Functions	
Auto Mode	Standard
Auto Fan	Standard
Auto Swing - Horizontal	Not Available
Auto Swing - Vertical	Standard
Clock on Remote Controller	Standard
Dry Mode	Standard
Dry Anti-Mildew (X-Fan) Mode	Not Available
Energy Saving Mode	Standard
Dirty Filter Alert	Not Available
I Feel Function	Standard
Lock on Remote Controller	Standard
Quiet Mode	Not Available
Room Temperature Display	Standard
Sleep Mode	Standard
4 Sleep Modes Options	Not Available
Timer Mode	Standard
Turbo Mode	Standard
Display On/Off Control	Standard
Freeze Guard Mode	Standard






COOLING PERFORMANCE*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		82°F DB	
	57°F WB		61°F WB		67°F WB		68°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
0°F	6,955	5,800	7,295	6,070	9,265	7,395	8,030	6,590
5°F	7,087	5,903	7,423	6,170	9,327	7,530	8,163	6,693
14°F	7,350	6,110	7,680	6,370	9,450	7,800	8,430	6,900
23°F	7,900	6,540	8,340	6,890	10,360	8,230	9,350	7,620
32°F	8,240	6,800	8,700	7,170	10,540	8,510	9,780	7,960
41°F	8,580	7,060	9,060	7,450	10,850	9,040	10,210	8,300
50°F	8,920	7,320	9,420	7,730	10,900	9,260	10,640	8,640
59°F	9,240	7,590	9,770	8,010	10,950	9,540	11,070	8,960
68°F	10,250	8,390	10,790	8,810	11,010	9,610	11,840	9,570
77°F	10,150	8,310	10,690	8,730	11,260	9,750	11,710	9,460
86°F	9,730	7,980	10,270	8,400	11,560	10,010	11,440	9,250
95°F	9,290	7,640	9,830	8,060	12,000	9,420	10,940	9,020
104°F	8,920	7,340	9,460	7,760	11,860	9,390	10,760	8,720
113°F	8,550	7,050	9,080	7,470	10,910	9,180	10,390	8,430
115°F	8,529	7,033	9,050	7,447	10,842	9,154	10,357	8,403
HEATING PERFORMANCE*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		86°F DB	
	57°F WB		61°F WB		67°F WB		72°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
-4°F	7,090	7,090	7,120	7,120	7,190	7,190	7,120	7,120
0°F	7,130	7,130	7,280	7,280	7,260	7,260	7,210	7,210
6°F	7,160	7,160	7,220	7,220	7,310	7,310	7,120	7,120
10°F	7,950	7,950	8,130	8,130	8,240	8,240	8,090	8,090
16°F	8,560	8,560	9,060	9,060	9,210	9,210	8,290	8,290
19°F	9,250	9,250	9,580	9,580	9,350	9,350	9,040	9,040
24°F	9,830	9,830	10,030	10,030	10,800	10,800	10,340	10,340
32°F	11,040	11,040	11,520	11,520	11,910	11,910	11,260	11,260
41°F	11,230	11,230	11,980	11,980	12,010	12,010	11,393	11,393
43°F	12,000	12,000	12,370	12,370	12,560	12,560	11,560	11,560
47°F	12,780	12,780	13,060	13,060	13,640	13,640	12,110	12,110
53°F	13,020	13,020	13,290	13,290	13,680	13,680	12,120	12,120
59°F	12,370	12,370	12,680	12,680	12,950	12,950	12,230	12,230
64°F	12,010	12,010	12,320	12,320	12,563	12,563	11,980	11,980
70°F	12,110	12,110	12,360	12,360	12,803	12,803	11,870	11,870
75°F	12,350	12,350	12,960	12,960	12,780	12,780	11,590	11,590

* Maximum System Capacity
 TC - Total Capacity(Btu/h)
 SHC - Sensible Capacity(Btu/h)

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM




INDOOR UNIT DIMENSIONS

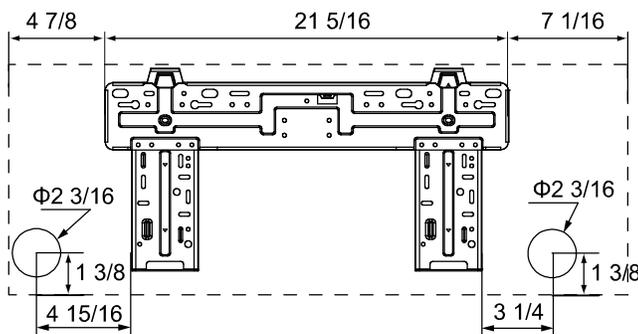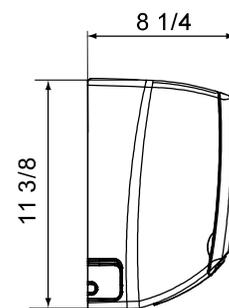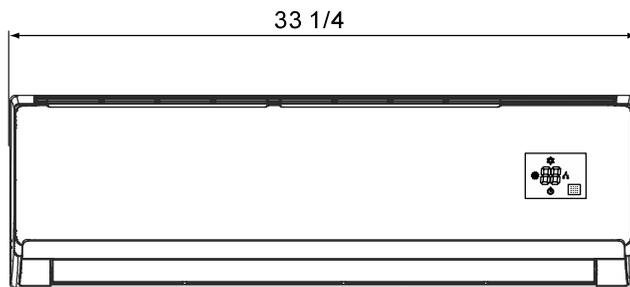

Unit: Inch




OUTDOOR UNIT DIMENSIONS

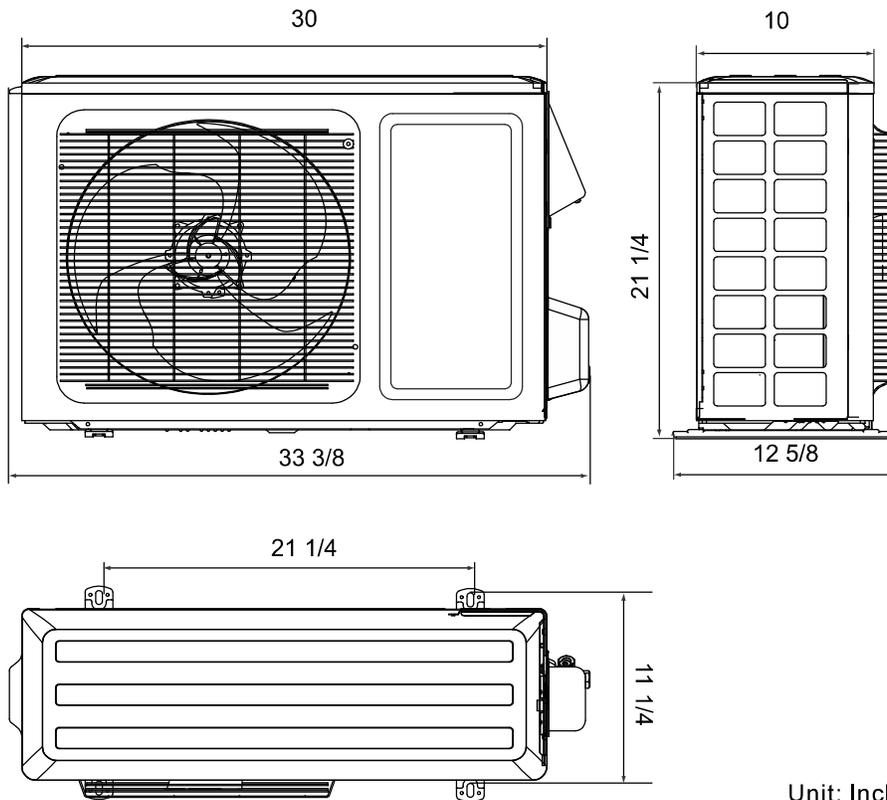

Unit: Inch



INSTALLATION DIAGRAM

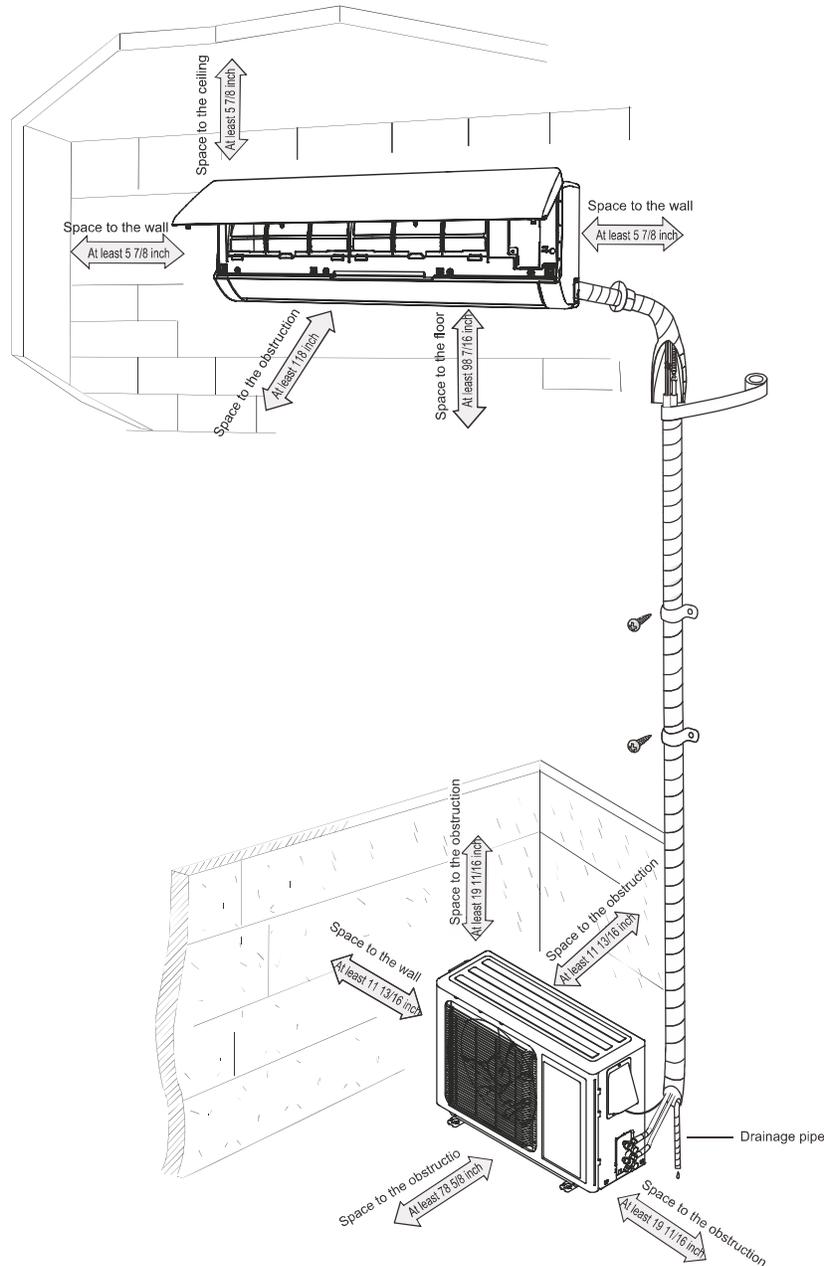

TOSOT NORTH AMERICA
930 W 21ST STREET, CHICAGO IL 60608
TEL: +1(312)800-8455
EMAIL: SALES@TOSOT-NA.COM