



TW24HQ1C2D		
Indoor Unit		TW24HQ1C2DI
Outdoor Unit		TW24HQ1C2DO
Performance		
Cooling Rated Capacity	Btu/h	22,000
Cooling Cap. Range Min-Max	Btu/h	8,630~23,200
SEER/EER		16.0/9.75
Heating Rated Capacity(47°F)	Btu/h	23,000
Heating Rated Capacity(17°F)	Btu/h	13,500
Heating Cap. Range Min-Max	Btu/h	8,650~26,000
HSPF/COP		9.0/2.9
Electrical		
Voltage, Phase, Cycle	V-Ph-Hz	208/230-1-60
Voltage Range	V	187~253
MCA	A	16.0
MOP	A	25
Compressor RLA	A	12.2
Fan Motor FLA	A	0.4
Cooling Power Input	W	2,260
Heating Power Input	W	2,300
Piping		
Pipe Length Min-Max	ft	10~82
Piping Lift	ft	33
Liquid Line	in	1/4
Vapor Line	in	5/8
Connection Type		Flare



Operating Range		
Cooling Outdoor DB	°F	0~115
Heating Outdoor DB	°F	-4~75
System Data		
Compressor Type		DC Inverter Rotary
Refrigerant Type		R410A
Pre-Charge	oz	65.3
Pre-Charge Length	ft	25
Additional Charge	oz/ft	0.54
Refrigerant Control		EXV
ODU Sound Pressure (Cooling/Heating)	dB(A)	59/59
IDU Sound Pressure (Cooling Min/Max)	dB(A)	36/48
IDU Sound Pressure (Heating Min/Max)	dB(A)	36/48
IDU Airflow (Cooling Min/Max)	cfm	530/706
IDU Airflow (Heating Min/Max)	cfm	530/706
Dehumidification	pts/hr	5.28



Job Name:		Date:	
Reference #:			
Signature:			

TOSOT NORTH AMERICA
 930W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM



Features	
Inverter Type	G10
Ultra Low Frequency Torque Control	Standard
Power Factor Correction	Standard
Compressor Type	High Eff. Rotary
Refrigerant Type	R410A
Basepan With Electric Heater	Standard
Compressor With Electric Heater	Standard
Outdoor Fin Coating	Blue Fin
Intelligent Defrosting	Standard
Intelligent Preheating	Standard
Low Voltage Startup	Standard
Memory/Power Failure Recovery	Standard
Self Diagnosis	Standard
Wired Controller Interface (XK-41)	Standard
Wi-Fi Interface Capable	Optional
Indoor Fan Type	Crossflow
Multi Fan Speeds	4 Speeds
Indoor Unit Display	Standard
Advance Filter	Optional
Auxiliary Electrical Heater	Not Available
Ventilation (Outdoor Air)	Not Available

Remote Controller Functions	
Auto Mode	Standard
Auto Fan	Standard
Auto Swing - Horizontal	Not Available
Auto Swing - Vertical	Standard
Clock on Remote Controller	Standard
Dry Mode	Standard
Dry Anti-Mildew (X-Fan) Mode	Not Available
Energy Saving Mode	Standard
Dirty Filter Alert	Not Available
I Feel Function	Standard
Lock on Remote Controller	Standard
Quiet Mode	Not Available
Room Temperature Display	Standard
Sleep Mode	Standard
4 Sleep Modes Options	Not Available
Timer Mode	Standard
Turbo Mode	Standard
Display On/Off Control	Standard
Freeze Guard Mode	Standard




COOLING PERFORMANCE*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		82°F DB	
	57°F WB		61°F WB		67°F WB		68°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
0°F	10,940	8,580	11,557	9,061	13,043	10,230	13,434	10,479
5°F	11,891	9,326	12,562	9,848	14,177	11,120	14,603	11,390
14°F	13,794	10,818	14,572	11,424	16,446	12,899	16,939	13,212
23°F	15,112	11,855	16,165	12,680	18,521	14,526	19,077	14,880
32°F	15,679	12,299	16,771	13,155	19,216	15,071	19,792	15,438
41°F	16,267	12,761	17,400	13,648	19,936	15,636	20,534	16,017
50°F	16,877	13,239	18,052	14,160	20,684	16,223	21,304	16,617
59°F	18,327	14,373	19,602	15,373	21,469	16,833	22,113	17,248
68°F	20,755	16,278	22,052	17,293	23,566	18,483	24,273	18,933
77°F	20,510	16,089	21,815	17,111	23,350	18,315	24,050	18,759
86°F	19,501	15,293	20,798	16,315	22,701	17,804	23,382	18,238
95°F	18,456	14,475	18,845	14,782	21,620	16,957	22,269	17,370
104°F	17,563	13,775	17,945	14,074	20,058	16,519	20,660	16,115
113°F	16,662	13,067	17,296	13,563	18,621	15,811	19,179	14,960
115°F	16,612	13,028	17,368	13,620	18,566	15,750	19,123	14,916
HEATING PERFORMANCE*								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		86°F DB	
	57°F WB		61°F WB		67°F WB		72°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
-4°F	11,659	11,659	11,463	11,463	11,235	11,235	11,000	11,000
0°F	12,634	12,634	12,423	12,423	12,176	12,176	11,912	11,912
6°F	13,328	13,328	13,103	13,103	12,843	12,843	12,564	12,564
10°F	13,882	13,882	13,650	13,650	13,379	13,379	13,089	13,089
16°F	14,302	14,302	14,064	14,064	13,784	13,784	13,482	13,482
19°F	14,576	14,576	14,337	14,337	14,052	14,052	13,741	13,741
24°F	16,216	16,216	15,971	15,971	15,653	15,653	15,382	15,382
32°F	18,123	18,123	17,878	17,878	17,522	17,522	17,289	17,289
41°F	20,304	20,304	20,065	20,065	19,666	19,666	19,469	19,469
43°F	20,851	20,851	20,605	20,605	20,195	20,195	20,016	20,016
47°F	22,659	22,659	22,267	22,267	21,824	21,824	21,299	21,299
53°F	22,884	22,884	22,484	22,484	22,037	22,037	21,510	21,510
59°F	23,410	23,410	22,996	22,996	22,538	22,538	22,000	22,000
64°F	23,907	23,907	23,487	23,487	23,019	23,019	22,470	22,470
70°F	24,356	24,356	23,935	23,935	23,459	23,459	22,898	22,898
75°F	24,700	24,700	24,265	24,265	23,782	23,782	23,213	23,213

* Maximum System Capacity
 TC - Total Capacity(Btu/h)
 SHC - Sensible Capacity(Btu/h)

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM




INDOOR UNIT DIMENSIONS

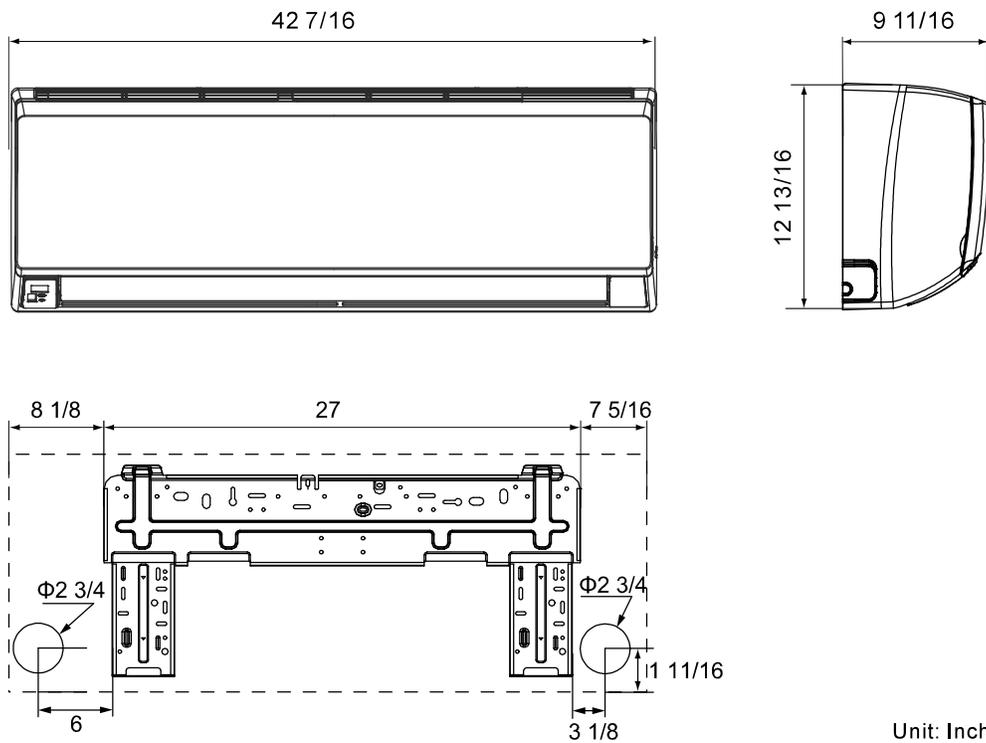

Unit: Inch




OUTDOOR UNIT DIMENSIONS

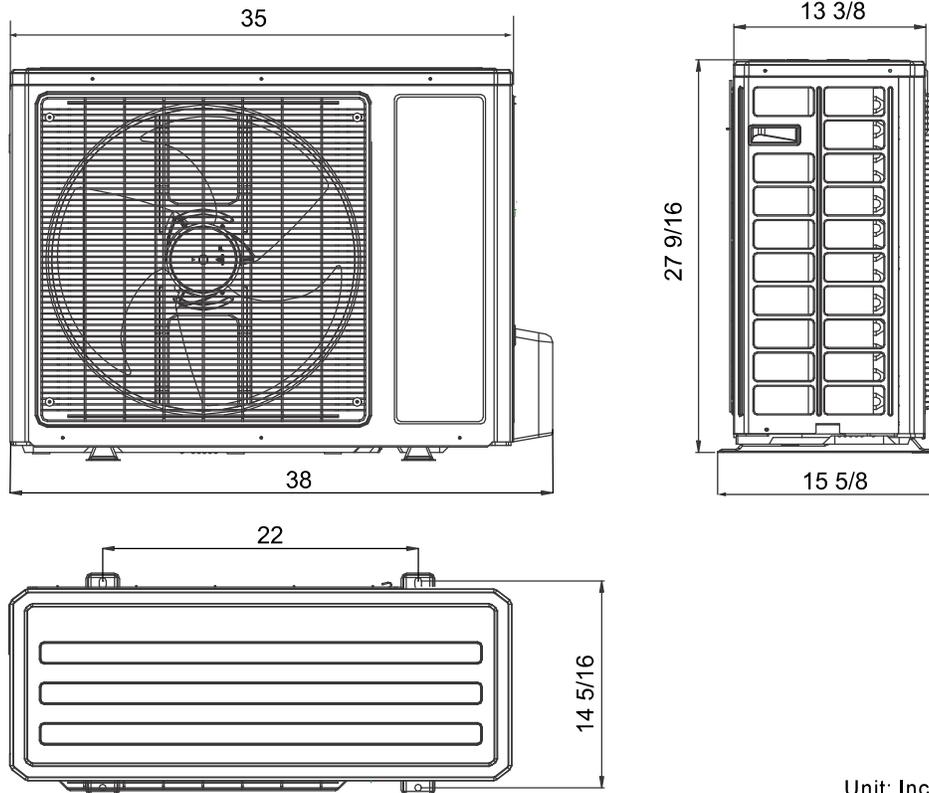

Unit: Inch



INSTALLATION DIAGRAM

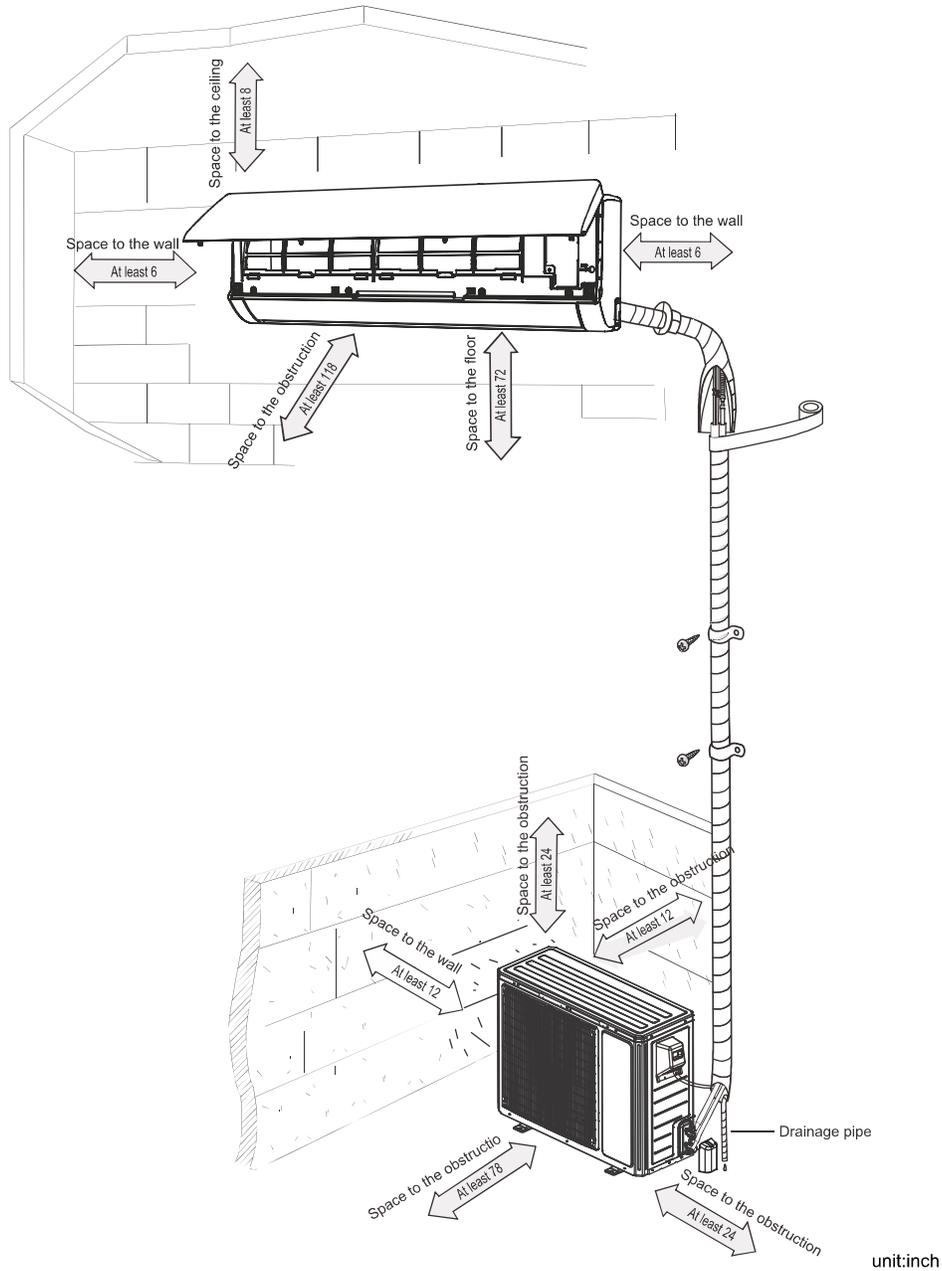

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM