



**SINGLE ZONE WALL MOUNTED HEAT PUMP SYSTEM**

<b>TW09HQ2C2A</b>		
Indoor Unit		TW09HQ2C2AI
Outdoor Unit		TW09HQ2C2AO
<b>Performance</b>		
Cooling Rated Capacity	Btu/h	9,000
Cooling Cap. Range Min-Max	Btu/h	2,764~10,918
SEER/EER		23.0/13.0
Heating Rated Capacity(47°F)	Btu/h	9,900
Heating Rated Capacity(17°F)	Btu/h	6,100
Heating Cap. Range Min-Max	Btu/h	2,081~13,989
HSPF/COP		10.5/3.1
<b>Electrical</b>		
Voltage, Phase, Cycle	V-Ph-Hz	115-1-60
Voltage Range	V	103~127
MCA	A	12
MOP	A	20
Compressor RLA	A	5.0
Fan Motor FLA	A	0.55
Cooling Power Input	W	700
Heating Power Input	W	930
<b>Piping</b>		
Pipe Length Min-Max	ft	10~49
Piping Lift	ft	33
Liquid Line	in	1/4
Vapor Line	in	3/8
Connection Type		Flare



<b>Operating Range</b>		
Cooling Outdoor DB	°F	0~115
Heating Outdoor DB	°F	-4~75
<b>System Data</b>		
Compressor Type		DC Inverter Rotary
Refrigerant Type		R410A
Pre-Charge	oz	42.3
Pre-Charge Length	ft	25
Additional Charge	oz/ft	0.2
Refrigerant Control		EXV
ODU Sound Pressure (Cooling/Heating)	dB(A)	53/53
IDU Sound Pressure (Cooling Min/Max)	dB(A)	26/43
IDU Sound Pressure (Heating Min/Max)	dB(A)	26/43
IDU Airflow (Cooling Min/Max)	cfm	171/377
IDU Airflow (Heating Min/Max)	cfm	171/377
Dehumidification	pts/hr	1.69



Job Name:		Date:	
Reference #:			
Signature:			

**TOSOT NORTH AMERICA**  
 930W 21ST STREET, CHICAGO IL 60608  
 TEL: +1(312)800-8455  
 EMAIL: SALES@TOSOT-NA.COM



Features	
Inverter Type	G10
Ultra Low Frequency Torque Control	Standard
Power Factor Correction	Standard
Compressor Type	High Eff. Rotary
Refrigerant Type	R410A
Basepan With Electric Heater	Standard
Compressor With Electric Heater	Not Available
Outdoor Fin Coating	Blue Fin
Intelligent Defrosting	Standard
Intelligent Preheating	Standard
Low Voltage Startup	Standard
Memory/Power Failure Recovery	Standard
Self Diagnosis	Standard
Wired Controller Interface (XK-41)	Standard
Wi-Fi Interface Capable	Optional
Indoor Fan Type	Crossflow
Multi Fan Speeds	4 Speeds
Indoor Unit Display	Standard
Advance Filter	Optional
Auxiliary Electrical Heater	Not Available
Ventilation (Outdoor Air)	Not Available

Remote Controller Functions	
Auto Mode	Standard
Auto Fan	Standard
Auto Swing - Horizontal	Not Available
Auto Swing - Vertical	Standard
Clock on Remote Controller	Standard
Dry Mode	Standard
Dry Anti-Mildew (X-Fan) Mode	Not Available
Energy Saving Mode	Standard
Dirty Filter Alert	Not Available
I Feel Function	Standard
Lock on Remote Controller	Standard
Quiet Mode	Not Available
Room Temperature Display	Standard
Sleep Mode	Standard
4 Sleep Modes Options	Not Available
Timer Mode	Standard
Turbo Mode	Standard
Display On/Off Control	Standard
Freeze Guard Mode	Standard



<b>COOLING PERFORMANCE*</b>								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		82°F DB	
	57°F WB		61°F WB		67°F WB		68°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
5°F	5,748	4,508	6,073	4,761	6,854	5,375	6,914	5,423
14°F	5,896	4,624	6,226	4,883	7,115	5,579	7,178	5,629
23°F	6,298	4,940	6,736	5,284	7,719	6,054	7,787	6,108
32°F	7,637	5,990	8,169	6,407	8,947	7,015	9,026	7,077
41°F	8,650	6,784	9,190	7,207	9,821	7,703	9,908	7,771
50°F	8,547	6,705	9,091	7,131	9,731	7,633	9,817	7,700
59°F	8,337	6,538	8,878	6,963	9,641	7,563	9,726	7,630
68°F	8,127	6,373	8,668	6,799	9,461	7,420	9,545	7,486
77°F	7,920	6,212	8,457	6,632	9,280	7,280	9,363	7,344
86°F	7,692	6,033	8,229	6,452	9,010	7,067	9,090	7,130
95°F	7,505	5,887	8,040	6,306	8,893	6,976	8,972	7,038
104°F	7,319	5,740	7,854	6,160	8,776	6,884	8,854	6,945
113°F	6,944	5,445	7,478	5,865	8,403	6,589	8,478	6,648




<b>HEATING PERFORMANCE*</b>								
Outdoor Ambient DB	Indoor Ambient Temperature							
	68°F DB		73°F DB		80°F DB		86°F DB	
	57°F WB		61°F WB		67°F WB		72°F WB	
	TC	SHC	TC	SHC	TC	SHC	TC	SHC
-4°F	5,194	5,194	5,145	5,145	5,058	5,058	4,854	4,854
0°F	5,628	5,628	5,575	5,575	5,482	5,482	5,256	5,256
6°F	5,937	5,937	5,881	5,881	5,782	5,782	5,544	5,544
10°F	6,184	6,184	6,126	6,126	6,024	6,024	5,776	5,776
16°F	6,370	6,370	6,311	6,311	6,206	6,206	5,949	5,949
19°F	6,497	6,497	6,432	6,432	6,327	6,327	6,064	6,064
24°F	7,218	7,218	7,156	7,156	7,048	7,048	6,788	6,788
32°F	8,059	8,059	7,997	7,997	7,889	7,889	7,629	7,629
41°F	9,021	9,021	8,960	8,960	8,854	8,854	8,591	8,591
43°F	9,263	9,263	9,201	9,201	9,093	9,093	8,833	8,833
47°F	10,101	10,101	9,999	9,999	9,826	9,826	9,399	9,399
53°F	10,203	10,203	10,098	10,098	9,922	9,922	9,492	9,492
59°F	10,435	10,435	10,330	10,330	10,148	10,148	9,708	9,708
64°F	10,658	10,658	10,550	10,550	10,364	10,364	9,915	9,915
70°F	10,859	10,859	10,748	10,748	10,562	10,562	10,104	10,104
75°F	11,011	11,011	10,899	10,899	10,707	10,707	10,243	10,243

\* Maximum System Capacity  
 TC - Total Capacity(Btu/h)  
 SHC - Sensible Capacity(Btu/h)

**TOSOT NORTH AMERICA**  
 930 W 21ST STREET, CHICAGO IL 60608  
 TEL: +1(312)800-8455  
 EMAIL: SALES@TOSOT-NA.COM




### INDOOR UNIT DIMENSIONS

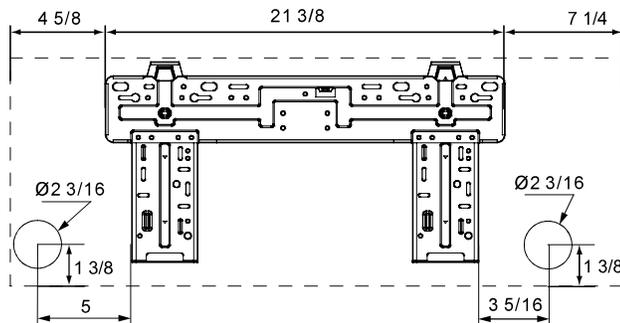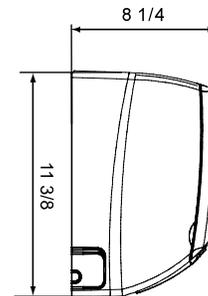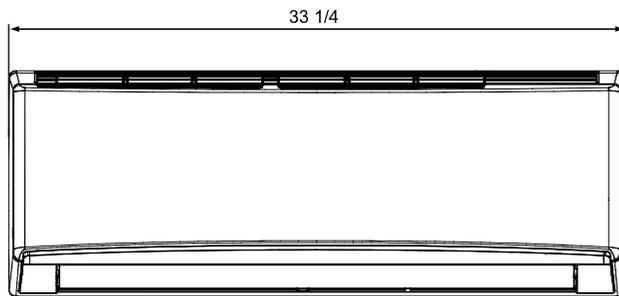

Unit:inch




**OUTDOOR UNIT DIMENSIONS**

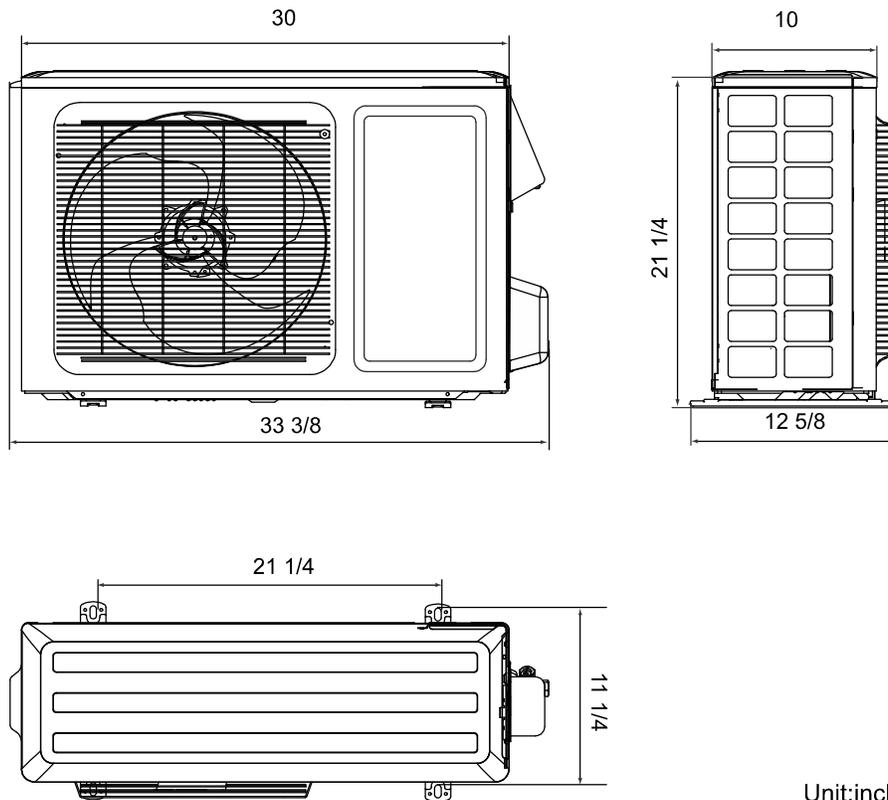

Unit:inch



### INSTALLATION DIAGRAM

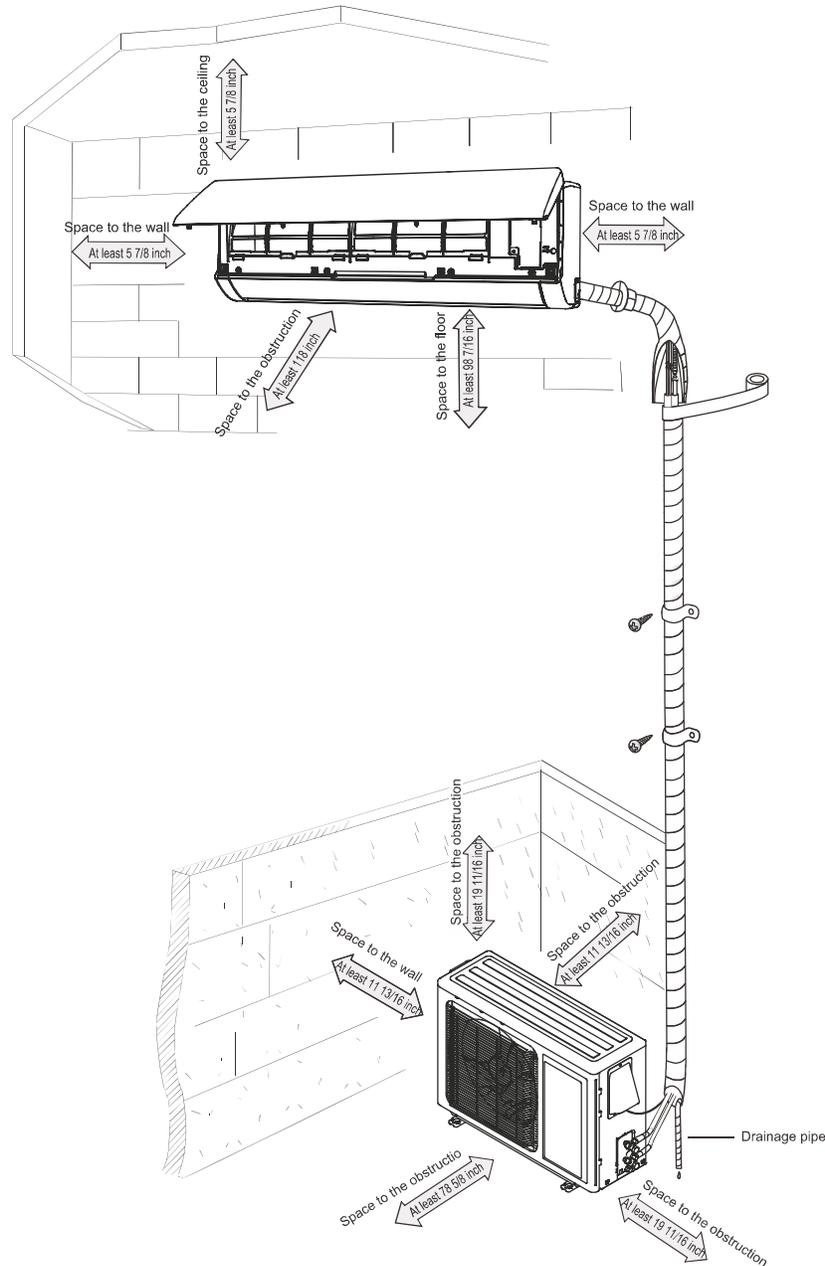

**TOSOT NORTH AMERICA**  
930 W 21ST STREET, CHICAGO IL 60608  
TEL: +1(312)800-8455  
EMAIL: SALES@TOSOT-NA.COM