



**Model:  
TU36-24AADU**



Air Handler		
Model	TU36-24AADU	
<b>Performance</b>		
Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	36,000
Airflow	cfm	1000
Sound Rating	dB(A)	49
<b>Electrical</b>		
Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Voltage Range	V	187~253
MCA	A	4
MOP	A	15
Control Voltage	V	24
<b>Blower Motor</b>		
Type	DC Direct Drive	
Speed Max	rpm	820
Power Output	hp	1/2
Full Load Amp(FLA)	A	2.1
<b>Blower</b>		
Type	Centrifugal	
Wheel Diameter	in	10-1/4
Wheel Height	in	9-11/16
<b>Filter, Coil and Refrigerant</b>		
Disposable Filter Size	in	18 x 20 x 1
Coil Area	sq ft	4.09
Fins per Inch(FPI) - Rows	16 - 4	
Expansion Valve	Qty	1
Refrigerant Type	R410A	
Pipe Connection Size - Liquid	in	3/8
Pipe Connection Size - Suction	in	3/4
Pipe Connection Type	Flare or Solder	
Condensate Drain Size	in	1
<b>Dimension and Weight</b>		
Dimensions(W x D x H)	in	21-1/4 x 21-1/4 x 48-1/4
Net Weight	lb	157

Job Name:		Date:	
Reference #:			
Signature:			

**TOSOT NORTH AMERICA**  
 930 W 21ST STREET, CHICAGO IL 60608  
 TEL: +1(312)800-8455  
 EMAIL: SALES@TOSOT-NA.COM




**TOSOT**

# T-UNIX

**TOSOT**

**DC DIRECT DRIVE AIR HANDLER**

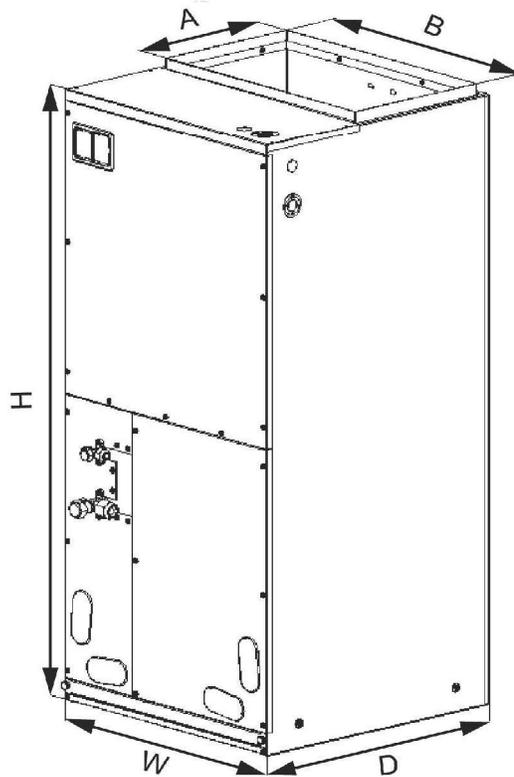

Model #	Dimensions				
	W	D	H	A	B
TU36-24AADU	21-1/4"	21-1/4"	48-1/4"	11-5/8"	20"



**TOSOT NORTH AMERICA**  
930 W 21ST STREET, CHICAGO IL 60608  
TEL: +1(312)800-8455  
EMAIL: SALES@TOSOT-NA.COM