



**Model:
TU60-24AADU**



Air Handler		
Model	TU60-24AADU	
Performance		
Cooling Rated Capacity	Btu/h	54,000
Heating Rated Capacity	Btu/h	54,000
Airflow	cfm	1600
Sound Rating	dB(A)	51
Electrical		
Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
Voltage Range	V	187~253
MCA	A	4
MOP	A	15
Control Voltage	V	24
Blower Motor		
Type	DC Direct Drive	
Speed Max	rpm	930
Power Output	hp	1
Full Load Amp(FLA)	A	3.2
Blower		
Type	Centrifugal	
Wheel Diameter	in	10-7/8
Wheel Height	in	11-1/4
Filter, Coil and Refrigerant		
Disposable Filter Size	in	20 x 20 x 1
Coil Area	sq ft	5.49
Fins per Inch(FPI) - Rows	14 - 4	
Expansion Valve	Qty	1
Refrigerant Type	R410A	
Pipe Connection Size - Liquid	in	3/8
Pipe Connection Size - Suction	in	3/4
Pipe Connection Type	Flare or Solder	
Condensate Drain Size	in	1
Dimension and Weight		
Dimensions(W x D x H)	in	24-3/4 x 21-1/4 x 57
Net Weight	lb	203

Job Name:		Date:	
Reference #:			
Signature:			

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM




TOSOT

T-UNIX

TOSOT

DC DIRECT DRIVE AIR HANDLER

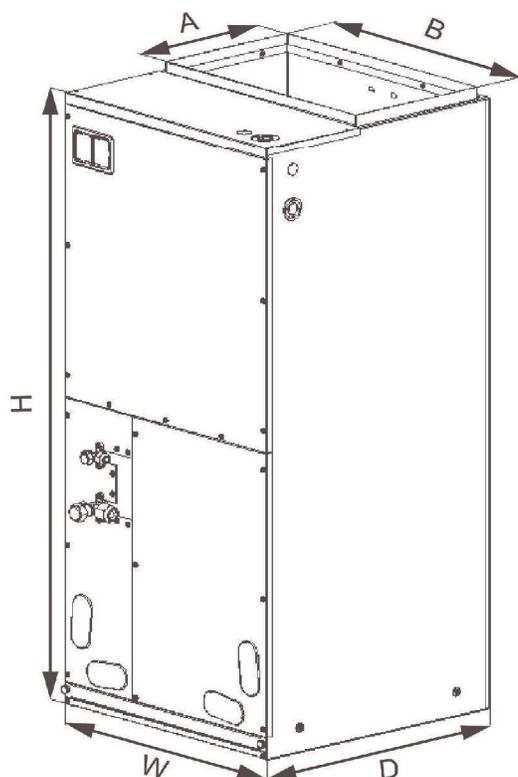

Model #	Dimensions				
	W	D	H	A	B
TU60-24AADU	24-3/4"	21-1/4"	57"	11-5/8"	20"



TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM