



FREE MATCH



HIGH-STATIC DUCT TYPE INDOOR UNIT

Model: TM12HSFDI



Item	Unit	Specification
IDU Model	—	TM12HSFDI
System and Electrical Ratings		
Cooling Capacity	Btu/h	12000
Heating Capacity	Btu/h	13000
Sound Pressure (High/Low)	dB(A)	38/26
Air Flow (High)	CFM	288.365
Air Flow (Low)	CFM	211.86
Ext Static Pressure (max/min)	InWg	0.6/0.24
Normal Operational Voltage	—	208-230 V, 1 Ph, 60 Hz
Voltage Range	V	187-253
Power Cable Size	—	0.82
Unit and Pipe Data		
Communication Cable Wire Size	—	AWG18-4
Unit Dimensions (L×H×D)	Inch	32.677x11.811x29.685
Weight (Net)	lbs	50.715
Weight (Gross)	lbs	63.945
Drain Connection	inch	φ0.98
Refrigerant Type	—	R410A
Gas Pipe Size	Inch	3/8
Liquid Pipe Size	Inch	1/2
Connection Method	—	Flare Connection




Job Name:		Date:	
Reference #:			
Signature:			

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM





FREE MATCH

OUTLINE AND PHYSICAL DIMENSIONS

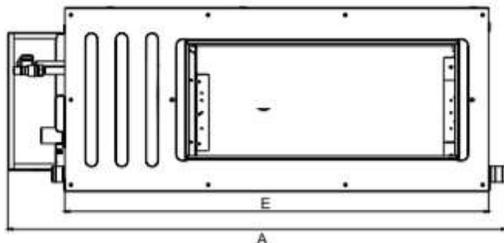

Unit: mm(inch)

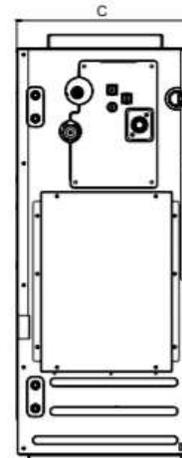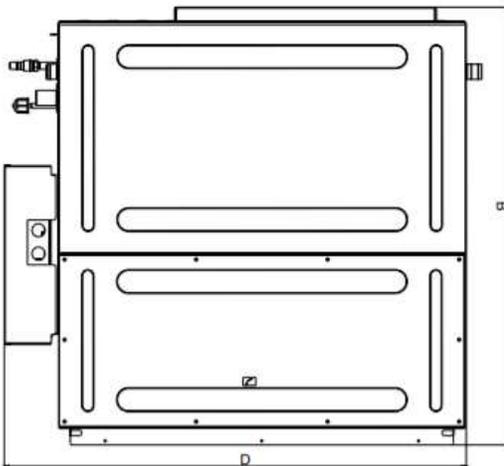

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared
Net Weight ODU	70.56 lb
Gross Weight ODU	83.79 lb

	A	B	C	D	E
TM12HSFDI	32 43/64	29 11/16	11 13/16	31 11/32	27 9/16

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM




FREE MATCH



HIGH-STATIC DUCT TYPE INDOOR UNIT

OUTLINE AND PHYSICAL DIMENSIONS

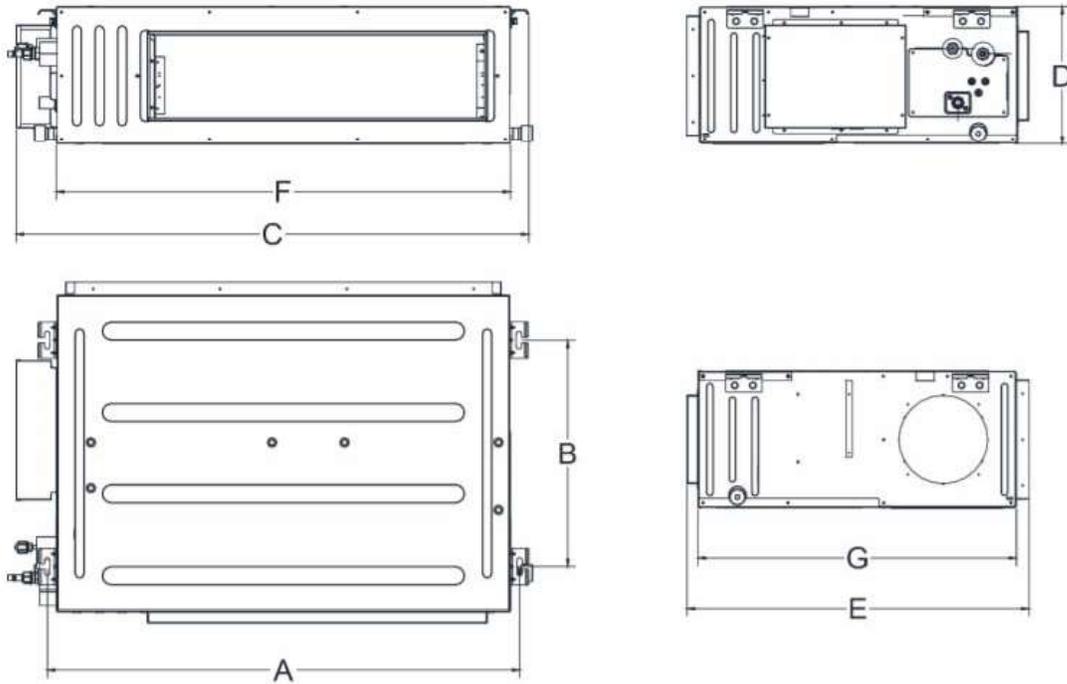

	A	B	C	D	E	F	G
TM12HSFDI	740 (29-1/8)	500 (19-11/16)	830 (32-11/16)	300 (11-13/16)	754 (29-11/16)	700 (27-9/16)	700 (27-9/16)

Unit: mm(inch)

TOSOT NORTH AMERICA
 930 W 21ST STREET, CHICAGO IL 60608
 TEL: +1(312)800-8455
 EMAIL: SALES@TOSOT-NA.COM



FREE MATCH

OUTLINE AND PHYSICAL DIMENSIONS

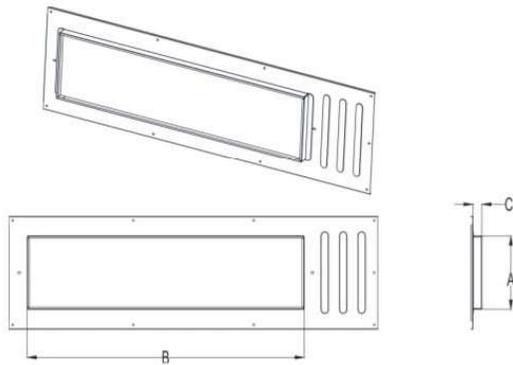
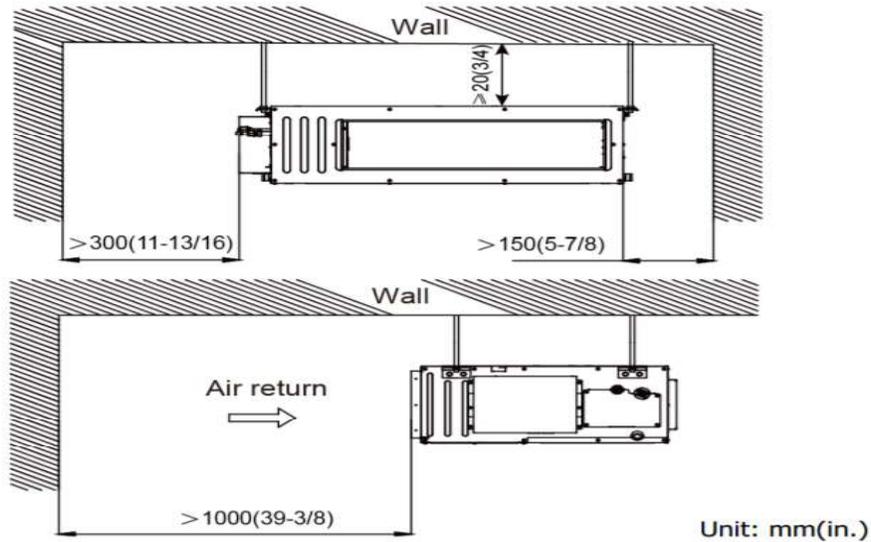


Fig 9.4.1 Air Outlet

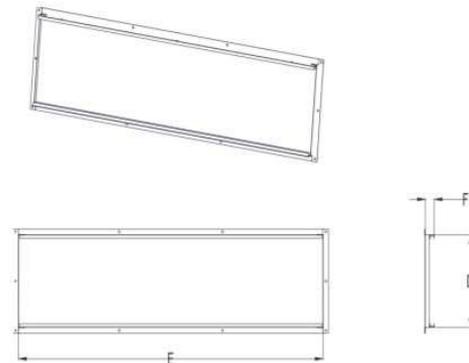


Fig 9.4.2 Air-return Opening

	Size of Air Outlet			Size of Air-return Opening		
	A	B	C	D	E	F
TM12HSFDI	195 (7-5/8)	451 (17-3/4)	25 (1)	264 (10-3/8)	660 (26)	660 (26)